





**WitchDoctor's Billet Specialties LLC**  
**License Plate Bracket (non lighted)**  
[www.buywitchdoctors.com](http://www.buywitchdoctors.com)




**Attention:**


This is an install at your own risk item. If you are not capable of installing it successfully then we suggest you take this item to a professional shop. Our plate bracket is shipped with a plastic protective cover on it. Remove the cover before installation. If any glue residue remains, it can be easily wiped off with a soft towel. Make sure to check out our rear axle cap & illuminated plate frame to complete your installation.

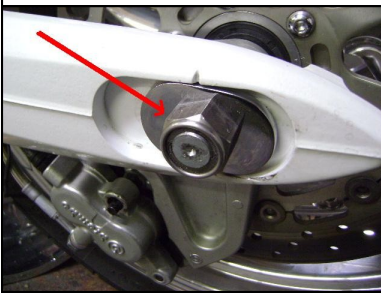

1) Remove the left axle nut. Most take a 27mm socket. If you don't shake the bike around everything will stay in place.

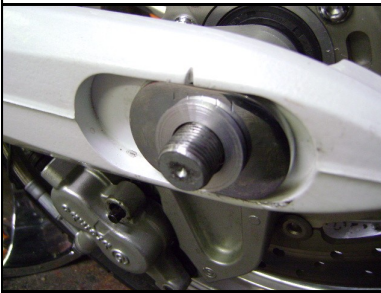

2) On models where the swing arm is recessed, install the spacer provided. If your swing arm is flat leave the spacer out.

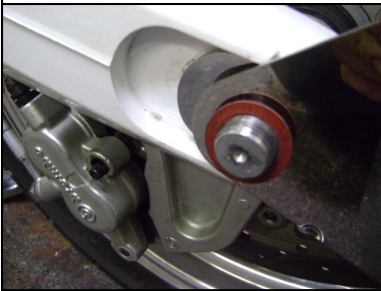

3) Install the new plate bracket and fiber washer. The washer will keep the plate from getting scratched up. Tilt the plate to the angle you want.



3) Install the axle nut and torque to spec. Consult a service manual for proper torque spec.