



CHROME CYLINDER BASE COVER for VICTORY

7627

THANK YOU FOR CHOOSING KÜRYAKYN!

PROTECT YOURSELF AND OTHERS FROM POSSIBLE INJURY AND PROPERTY DAMAGE OR LOSS. PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS, AND NOTICES REGARDING THE INSTALLATION, USE, AND CARE OF THIS PRODUCT.

WARNING	THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.
CAUTION	This indication alerts you to the fact that ignoring the contents described herein can result in minor or moderate potential injury.
NOTICE	This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

MAKE SURE THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Right Cylinder Base Cover
- 1 Left Cylinder Base Cover
- 1 Hardware Kit containing:
 - 1 Rear Weldment
 - 1 Front Bracket
 - 1 Short Rod
 - 1 Long Rod
 - 5 M5 X 0.8 X 12MM Socket Head Cap Screws
- 1 Installation instructions

TOOLS SUGGESTED:

Set of metric hex wrenches or metric socket bit set and ratchet

NOTICE These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future reference.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Allow the engine and exhaust system to cool.

NOTICE Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

WARNING YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.

• Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn
454 County Road V V
Somerset, WI 54025-9031
Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.


©2005 Kuryakyn USA® All Rights reserved.



CAUTION


Working around the sharp edges of the cylinder-head fins exposes your hands to injury. Wear protective gloves to prevent serious injury.

STEP 2 Remove the two existing screws shown in **PIC 1**; set them within arms reach of the work area, they will be reused.

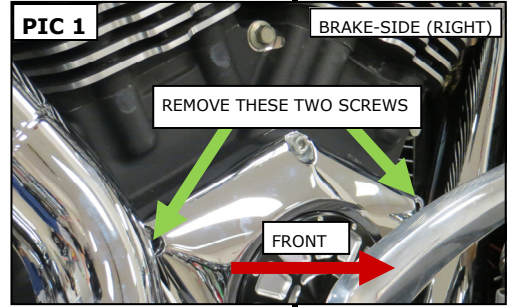

STEP 3 Refer to **PIC 2**. Locate the included brake-side (Right) Cylinder Base Cover, Front Bracket, Rear Weldment, Long and Short Rods, and three (3) M5 Screws.

STEP 4 Refer to **PIC 3**. Secure the Short Rod to the peak of the Cover with one of the M5 screws; hold the rod with one hand while tightening the screw.

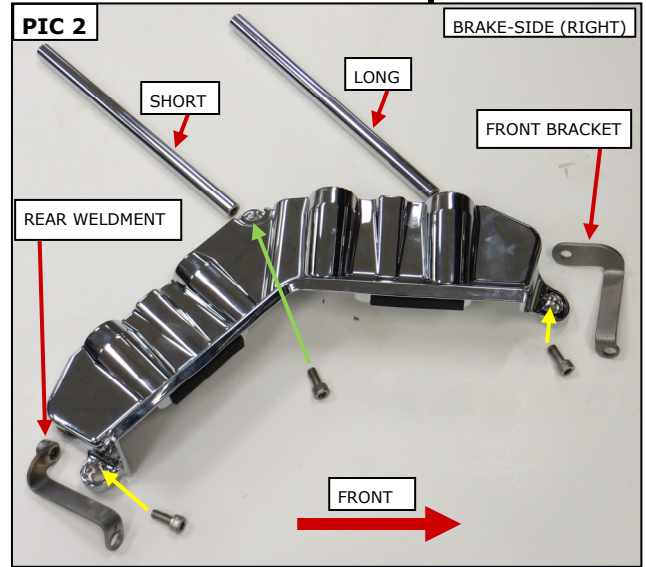

STEP 5 Refer to **PIC 3**. Use the Long Rod to "sandwich" the Front Bracket against the front of the cover; secure the Rod and Bracket with one of the M5 screws; leave it loose for now.

STEP 6 Refer to **PIC 3**. Secure the Rear Weldment to the rear of the Cover with one of the M5 screws; leave it loose for now.


STEP 7 Refer to **PIC 3**. Carefully slide the Cover into place; adjust the Weldment as necessary to clear the exhaust.

Once in place, align the weldment and bracket holes with the engine case holes; secure with the two screws removed in **STEP 2**; leave the screws loose for now.

NOTE: If equipped, remove the Kuryakyn Primary Cover before continuing the installation.

STEP 8 Locate the included clutch-side (Left) Cylinder Base Cover and remaining two (2) M5 Screws.

STEP 9 Refer to **PIC 4**. Carefully align the Left Cover holes with the Short and Long Rod Ends; secure the Cover to the Rods with the two M5 Screws; leave them loose for now.

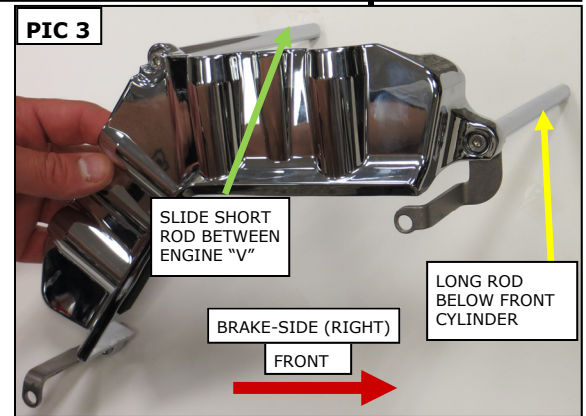


Ensure that the two rubber bumpers on the inside edge of the Left Cover remain in place as it is installed under the cylinder fins.

STEP 10 Ensure that the Covers do not contact any other parts, then tighten all the screws.

STEP 11 Reinstall the Kuryakyn Primary Cover (if equipped).

NOTICE

It is the end user's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

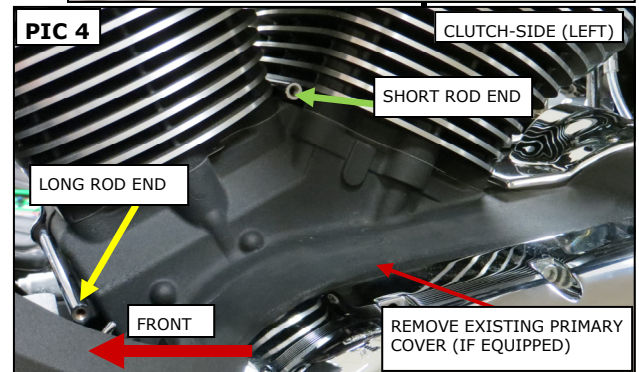

Ride On!